


SAW Bandpass Filter F2G34



Features

- RF bandpass filter
- High attenuation
- No matching single-ended operation
- Ceramic Surface Mounted Device Package (3.0 mm × 3.0 mm)
- RoHS Compliant

Package Dimension

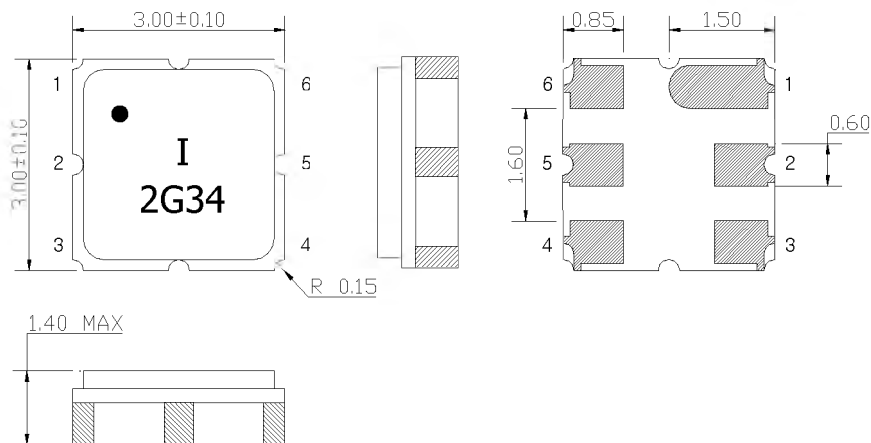

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 μ m, Over a 1.27 ~ 8.89 μ m
Ni Plating

Pin Configurations

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameters	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	85
Storage Temperature Range	°C	-50	-	95
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

SAW Bandpass Filter F2G34



Specifications

F₀ = 2345.0 MHz

	Minimum	Typical	Maximum	Unit
Center Frequency (F _c)	-	2345.0	-	MHz
Insertion Loss (In F _c ±13.5 MHz)	-	2.7	4.0	dB
Amplitude Ripple (In F _c ±13.5 MHz)	-	0.9	2.0	dB
VSWR (In F _c ±13.5 MHz)	-	1.5	2.5	
Relative Attenuation				
0.3 MHz ~ 2187.0 MHz	35	40	-	dB
@ 2239MHz	27	43	-	
@ 2412MHz	12	40	-	
@ 2438MHz	17	50	-	
@ 2512MHz	27	50	-	
@ 2538MHz	32	50	-	
2700.0 MHz ~ 3000.0 MHz	30	40	-	
Input/Output Impedance		50		Ohm

Notes :


- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss

SAW Bandpass Filter F2G34




Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration



1) Pad Number 1 Index

2) Manufacturer name



3) Marking Number

* Ink or Laser Marking available





SAW Bandpass Filter F2G34



Typical Performance (at +25°C)

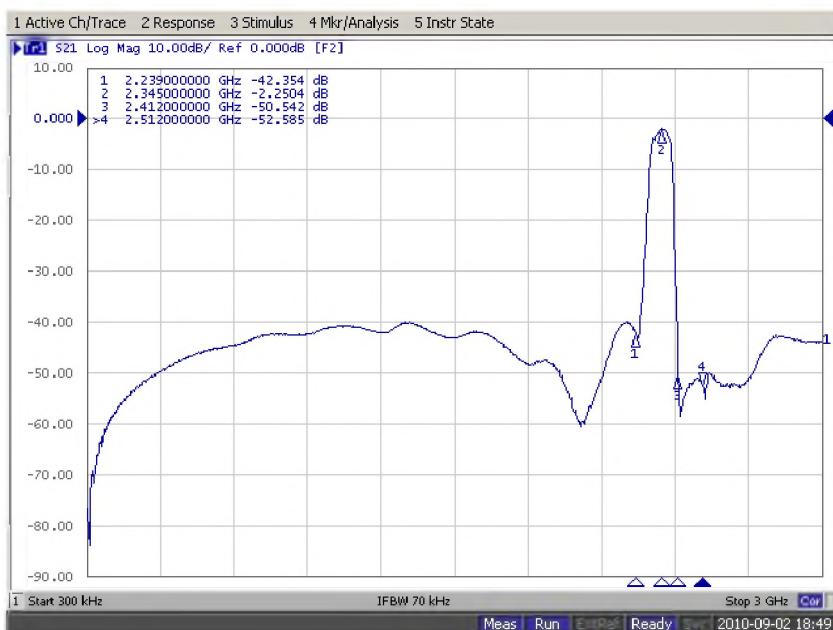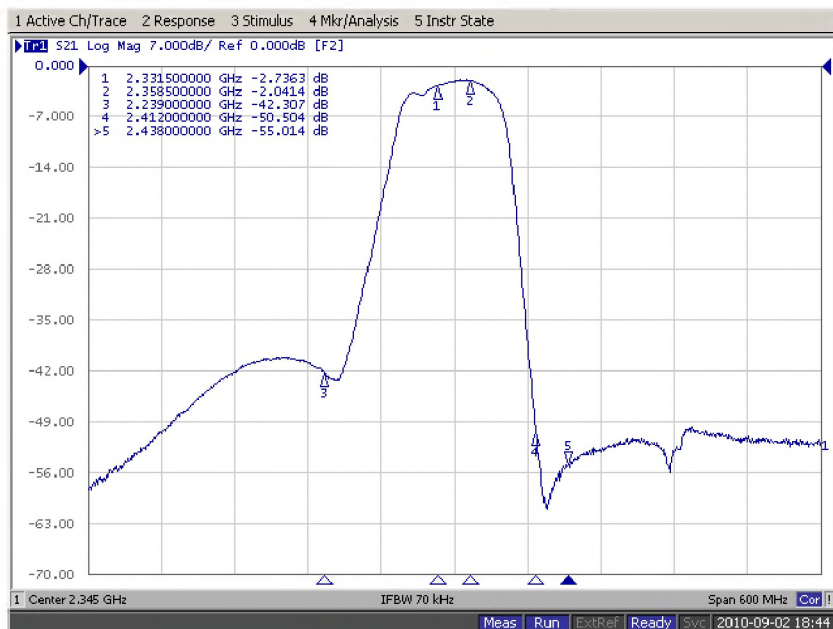

SAW Bandpass Filter F2G34

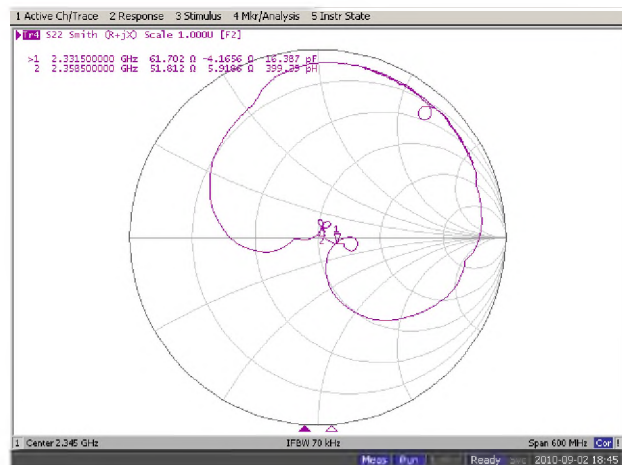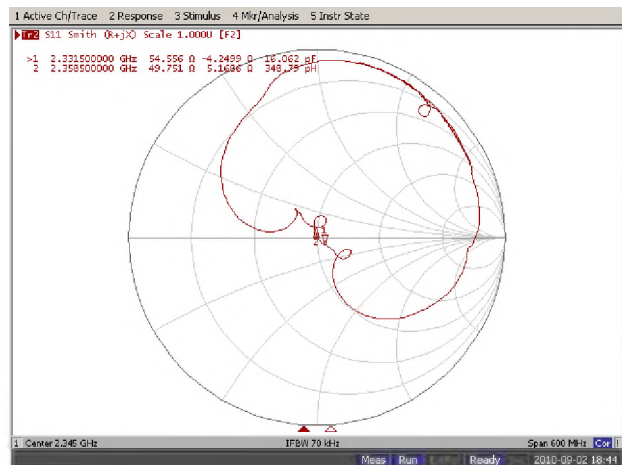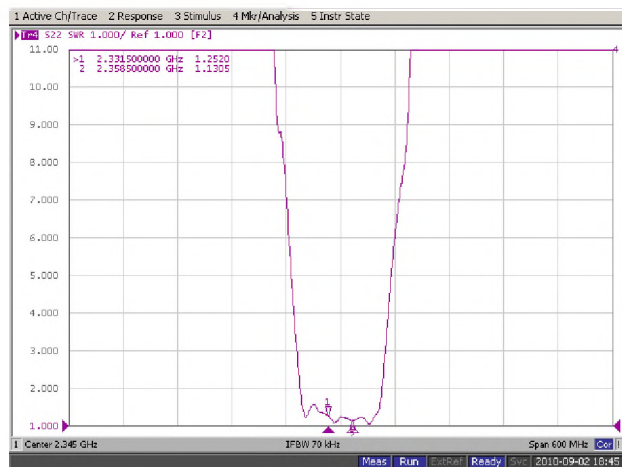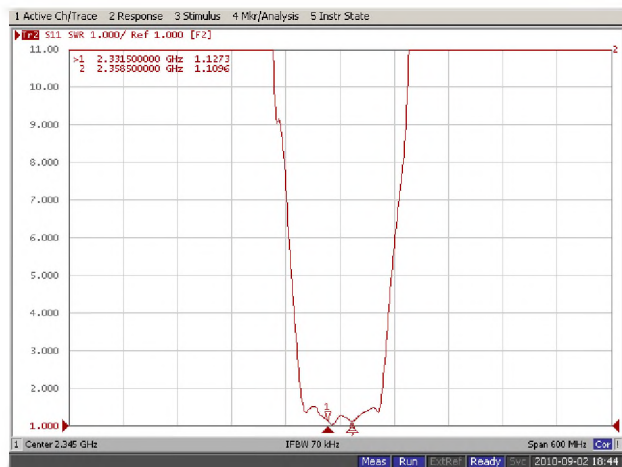


SAW Bandpass Filter F2G34




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

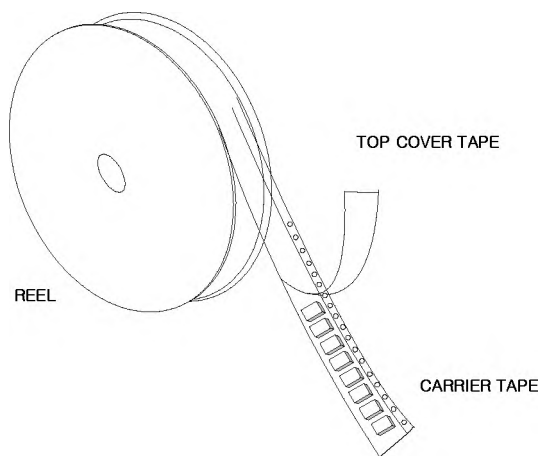

Tape Specification

1. Leader part and vacant position specification

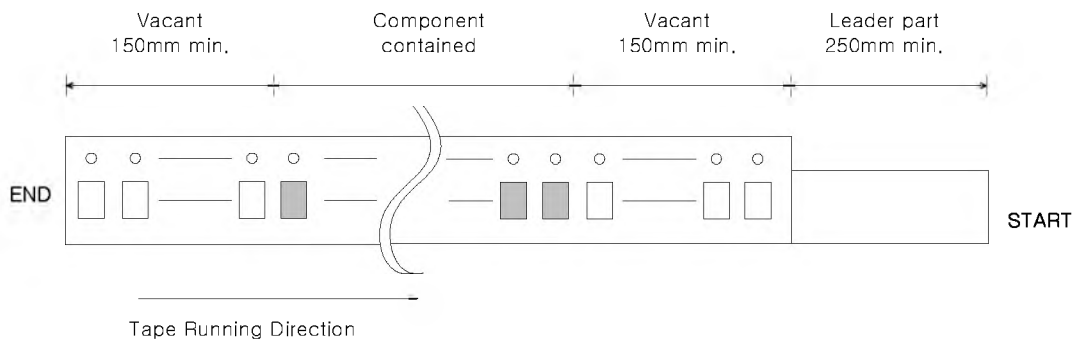

2. Tensile strength of carrier tape


4.4N/mm width

3. Top cover tape adhesion

1) pull off angle : 0~15°

2) speed : 300mm/min


3) force : 20~70g

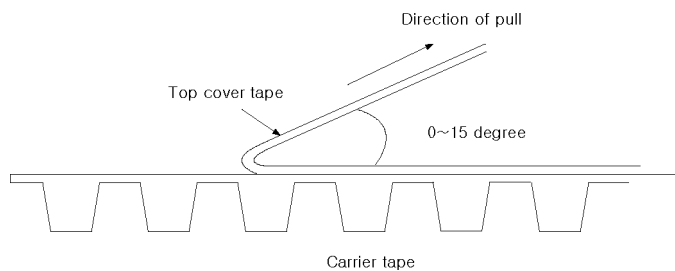

SAW Bandpass Filter F2G34




Carrier Tape Dimensions [unit : mm]

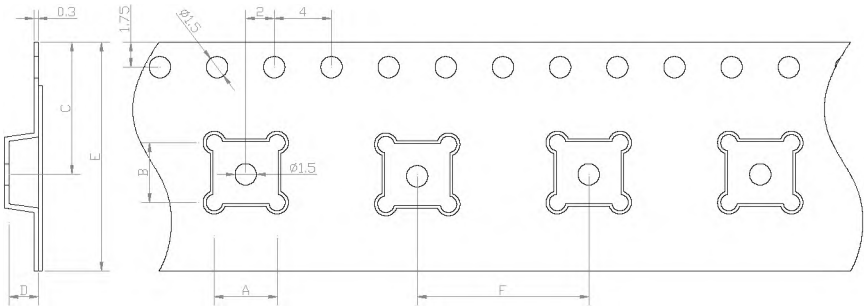

A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

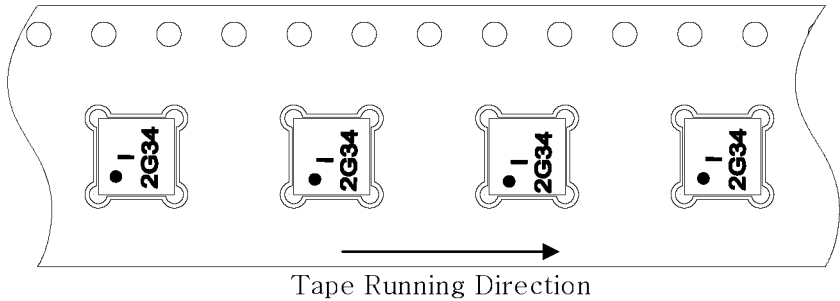

Reel Dimensions [unit : mm]

