


SAW Bandpass Filter F2G35



Features

- RF bandpass filter
- High attenuation
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package (3.0 mm * 3.0 mm)
- RoHS Compliant

Package Dimensions

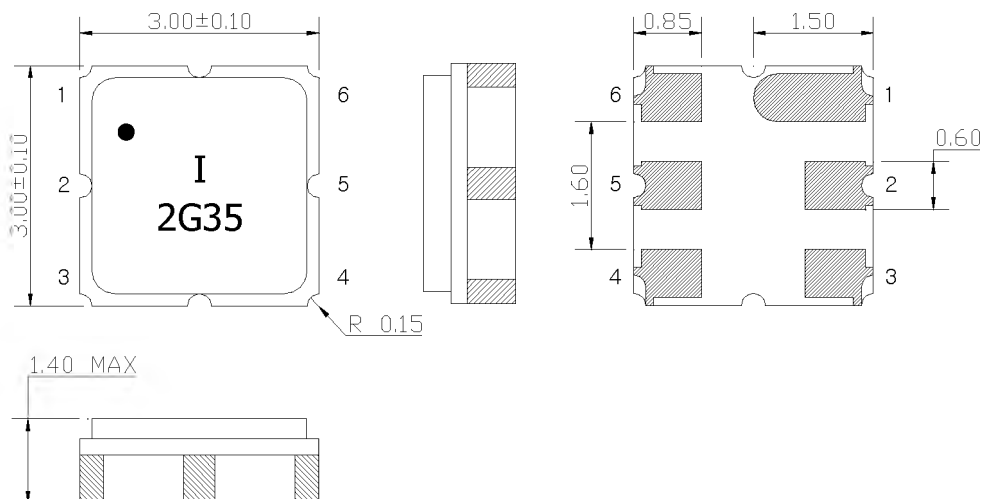

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration

2	Input
5	Output
1, 3, 4, 6	Case ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	℃	20	25	70
Storage Temperature Range	℃	-40	25	85
Power Handling Capability	dBm	-	-	8

Electrostatics Sensitive Device (ESD)

SAW Bandpass Filter F2G35



Preliminary Specifications

$F_c = 2313.5 \text{ MHz}$

	Minimum	Typical	Maximum	Unit
Center Frequency (F_c)	-	2313.5	-	MHz
Insertion Loss (2300 ~ 2327 MHz)	-	2.4	3.0	dB
Amplitude Ripple (2300 ~ 2327 MHz)	-	0.7	1.8	dB p-p
VSWR (2300 ~ 2327 MHz)	-	1.3	1.8	
Attenuation				
1800 ~ 2200 MHz	40	45	-	dB
2200 ~ 2238.5 MHz	25	32	-	
2390 ~ 2400 MHz	30	50	-	
2400 ~ 2800 MHz	40	52	-	
Input/Output Impedance		50		Ohms

Notes :


- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 3) All attenuation measurements are measured relative to insertion loss

SAW Bandpass Filter F2G35



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

1)
●
I²⁾
2G35³⁾

1) Pad Number 1 Index

2) Manufacturer name



3) Marking Number

* Ink or Laser Marking available

SAW Bandpass Filter F2G35





Typical Performance (at 25°C)

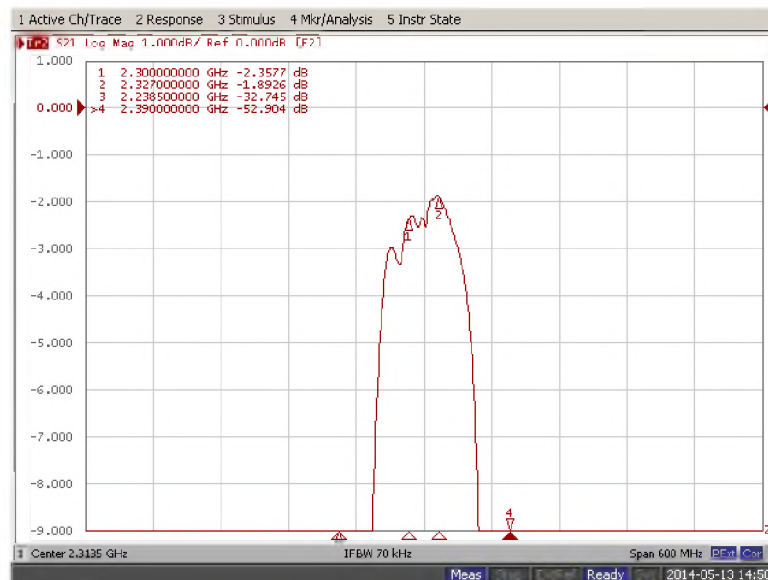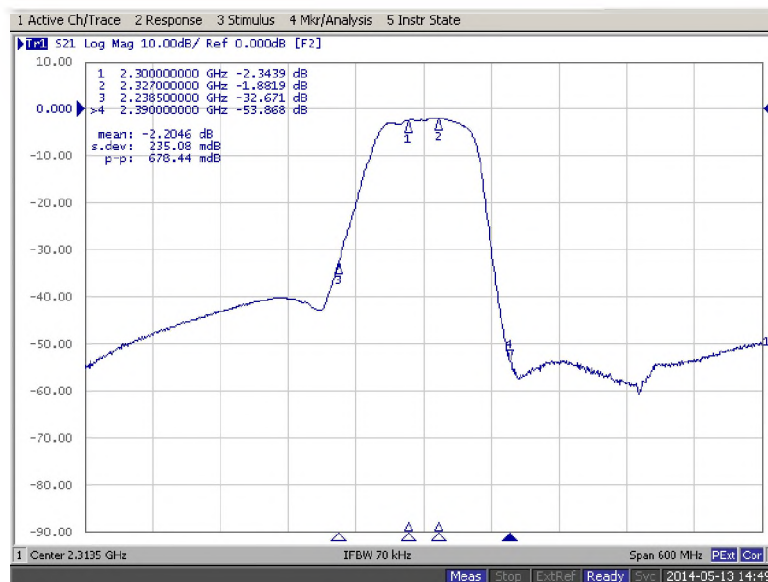



SAW Bandpass Filter F2G35



Input / Output VSWR Charts

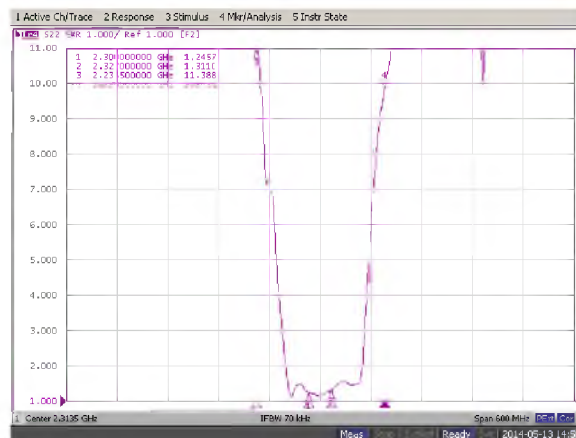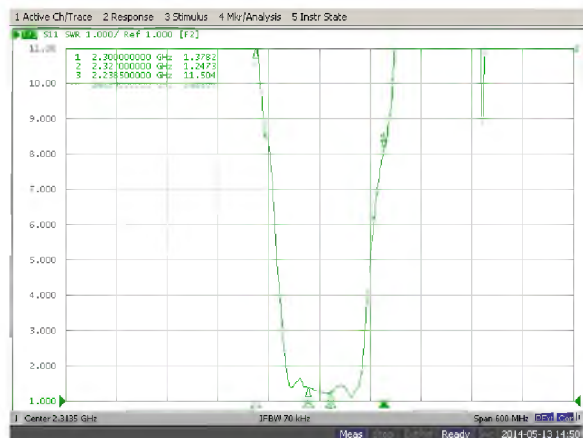

Input / Output Smith Charts

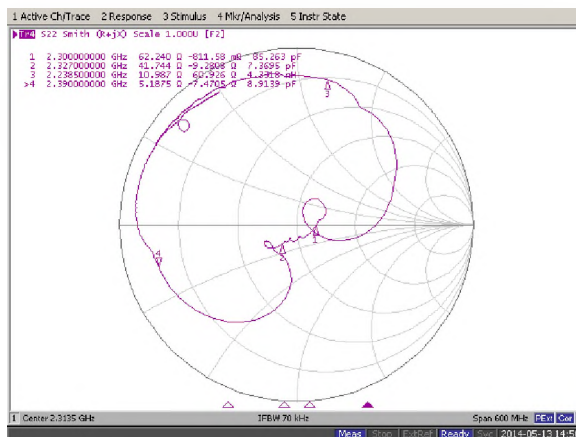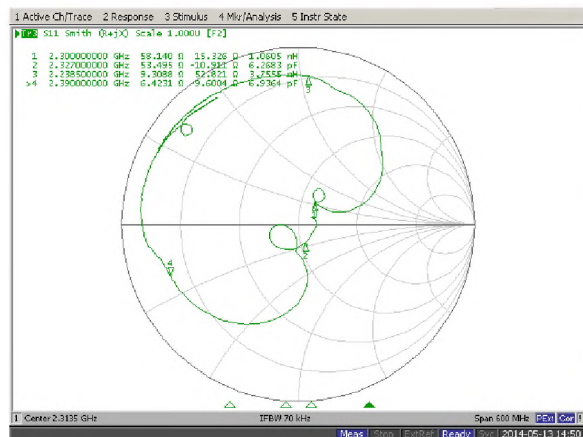


SAW Bandpass Filter F2G35




Packing Specifications

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

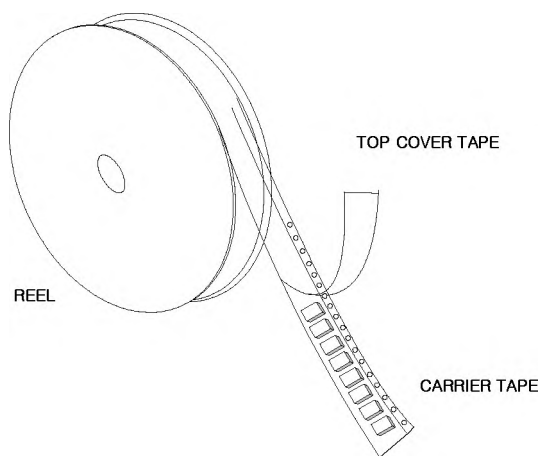

Tape Specification

1. Leader part and vacant position specification

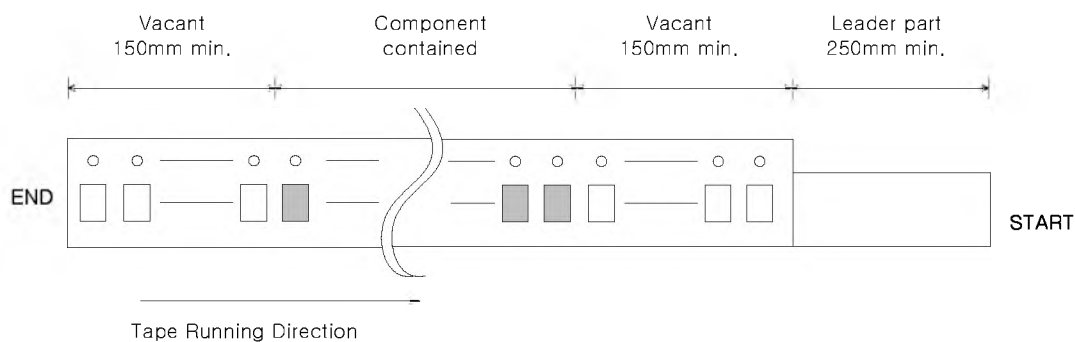


2. Tensile strength of carrier tape

4.4N/mm width

3. Top cover tape adhesion


- 1) pull off angle : 0~15°
- 2) speed : 300mm/min
- 3) force : 20~70g

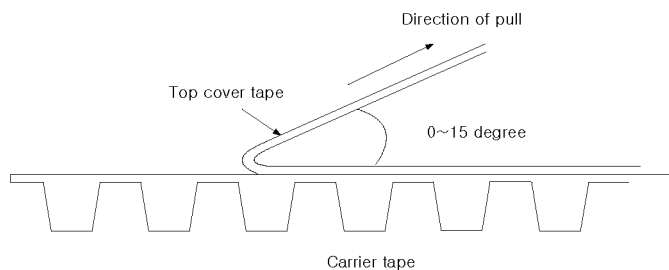

SAW Bandpass Filter F2G35




Carrier Tape Dimensions [unit : mm]

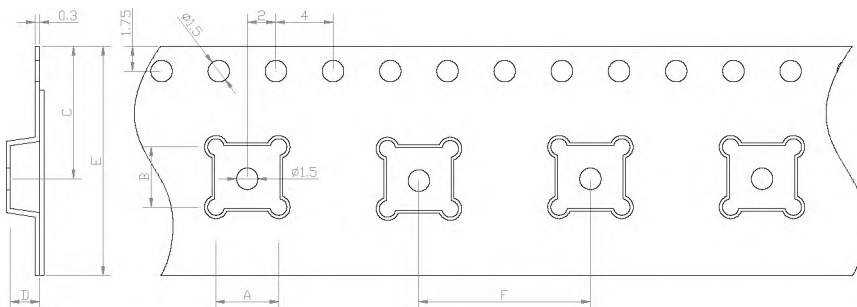

A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

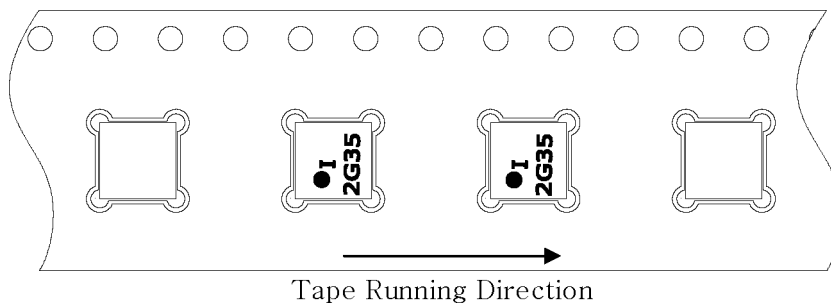

Reel Dimensions [unit : mm]

