


Bandpass Filter 210751B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40 °C ~ 85 °C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

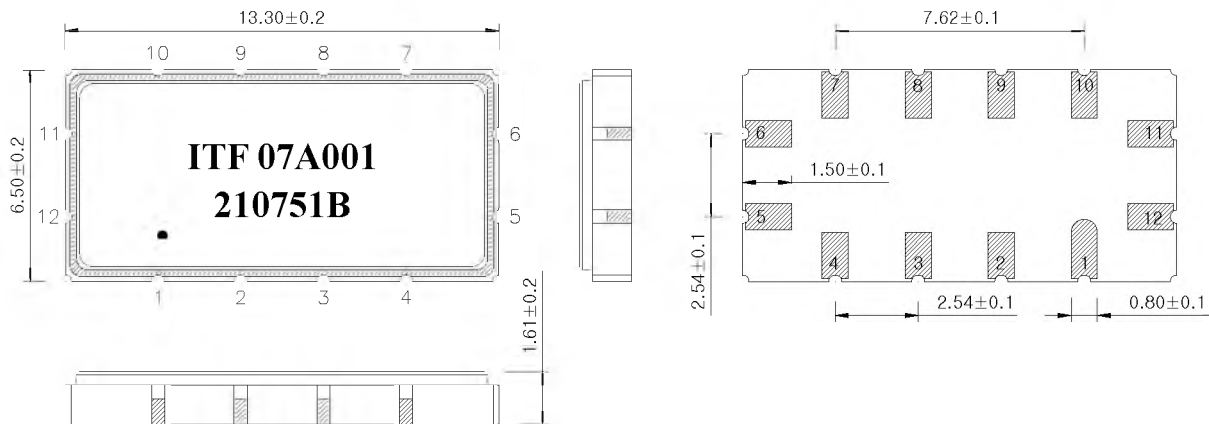

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al₂O₃

Lid : Kovar, Ni Plated

Termination : Au plating 0.3 ~ 1.0um, over a 1.27 ~ 8.89um Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

Bandpass Filter 210751B



3. Specifications

Fo = 60.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Operating temperature range : -35℃ ~ +75℃		Minimum	Typical	Maximum
Center Frequency (Fc)	MHz	-	60.0	-
Insertion Loss	dB	-	9.5	10.5
1dB Bandwidth	MHz	6.8	7.1	-
3dB Bandwidth	MHz	7.3	7.6	-
40dB Bandwidth	MHz	-	9.7	10.2
Amplitude Ripple (Fo +/- 2.95 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 2.95 MHz)	nsec	-	80	120
Absolute Delay	usec	-	1.5	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency (TCF)	ppm/℃	-	- 86	-

Room temperature : + 25℃		Minimum	Typical	Maximum
Center Frequency	MHz	-	60.0	-
Amplitude Ripple (Fo +/- 3.2 MHz)	dB	-	0.6	1.0
Group Delay Variation (Fo +/- 3.2 MHz)	nsec	-	80	120

Bandpass Filter 210751B




Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss

4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

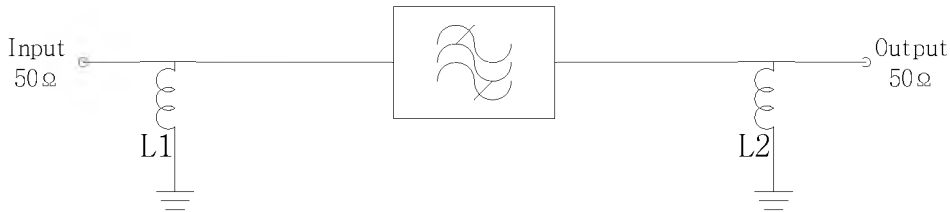

$$L1 = 68 \text{ nH}, \quad L2 = 68 \text{ nH}$$

5. Marking Configuration

ITF¹⁾07A001²⁾

210751B³⁾

●⁴⁾

1) Manufacturer name

2) Lot Number



3) Part Number

4) Pad Number 1 Index

Bandpass Filter 210751B



6. Typical Performance (at +25℃)

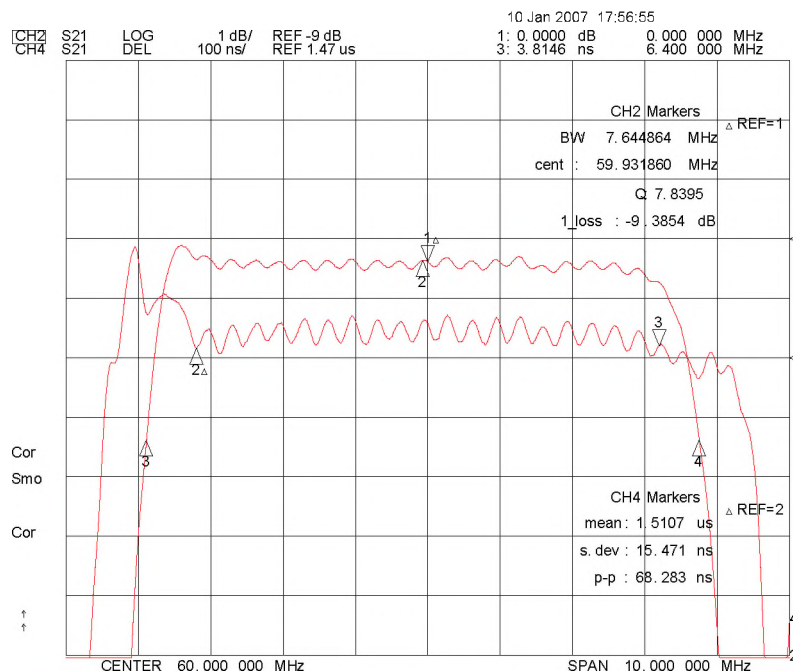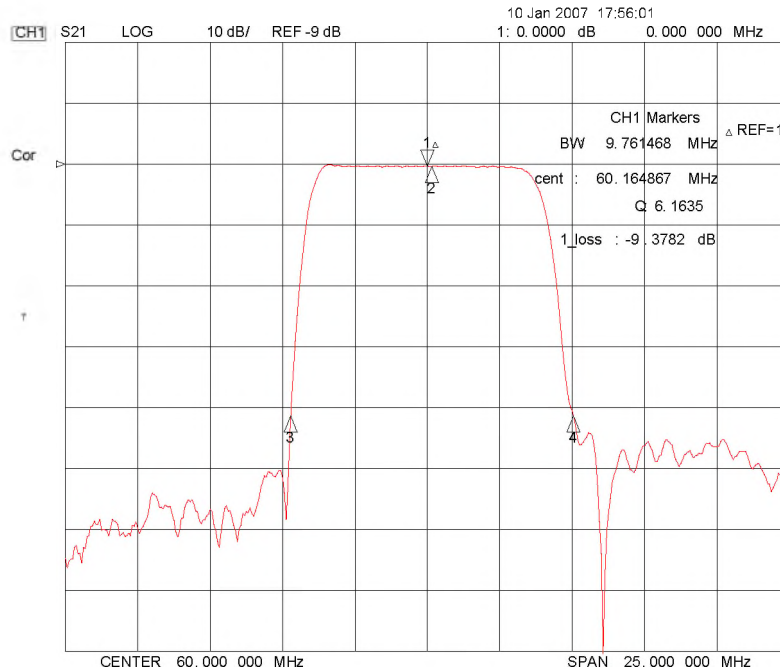

Bandpass Filter 210751B

