


Bandpass Filter 222153B



1. Features

- IF bandpass filter
- Low-Loss Filter
- Single-ended operation
- Ceramic Surface Mount Device(SMD) Package
- Maximum Storage Temperature Range : -40 °C ~ 85 °C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

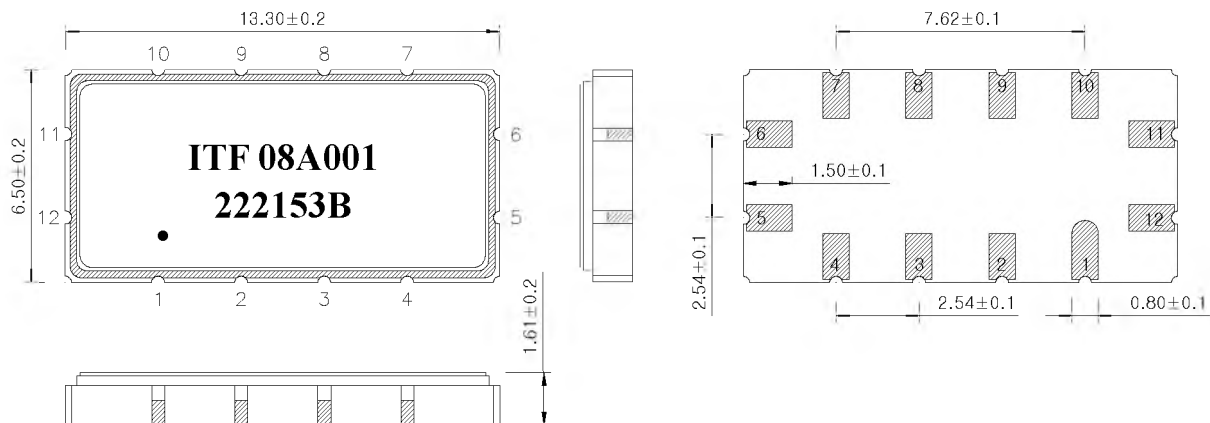

Package : S1365

Dimensions shown are nominal in millimeters

Body : Al_2O_3

Lid : Kovar, Ni Plated

Termination : Au plating $0.3 \sim 1.0\mu\text{m}$, over a $1.27 \sim 8.89\mu\text{m}$ Ni Plating

Pin Configuration	
11	Input
5	Output
6, 12	Ground
Other	Case ground

Bandpass Filter 222153B



3. Specifications

$F_0 = 62.5 \text{ MHz}$

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

Room temperature : +25 °C		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	62.5	-
Insertion Loss	dB	-	15.5	18.0
1dB Bandwidth	MHz	20.8	21.02	-
3dB Bandwidth	MHz	-	21.7	-
40dB Bandwidth	MHz	-	24.8	25.5
Amplitude Ripple ($F_0 \pm 9.32 \text{ MHz}$)	dB	-	0.3	1.0
Group Delay Variation ($F_0 \pm 9.32 \text{ MHz}$)	nsec	-	30	60
Absolute Delay	usec	-	1.19	-
Ultimate Rejection	dB	40	45	-
Temperature Coefficient of Frequency (TCF)	ppm/°C	-	- 86	-

Notes :


- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration
- 3) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4) All attenuation measurements are measured relative to insertion loss

Bandpass Filter 222153B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

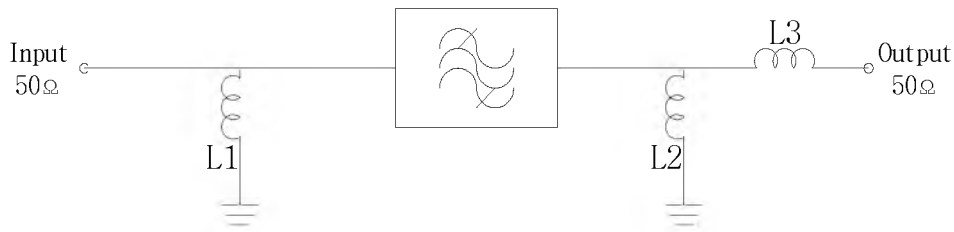

$$L1 = L2 = 120 \text{ nH}$$

$$L3 = 8.2 \text{ nH}$$

5. Marking Configuration

ITF¹⁾ 08A001²⁾

222153B³⁾

●⁴⁾

1) Manufacturer name

2) Lot Number



3) Part Number

4) Pad Number 1 Index

Bandpass Filter 222153B



6. Typical Performance (at +25°C)

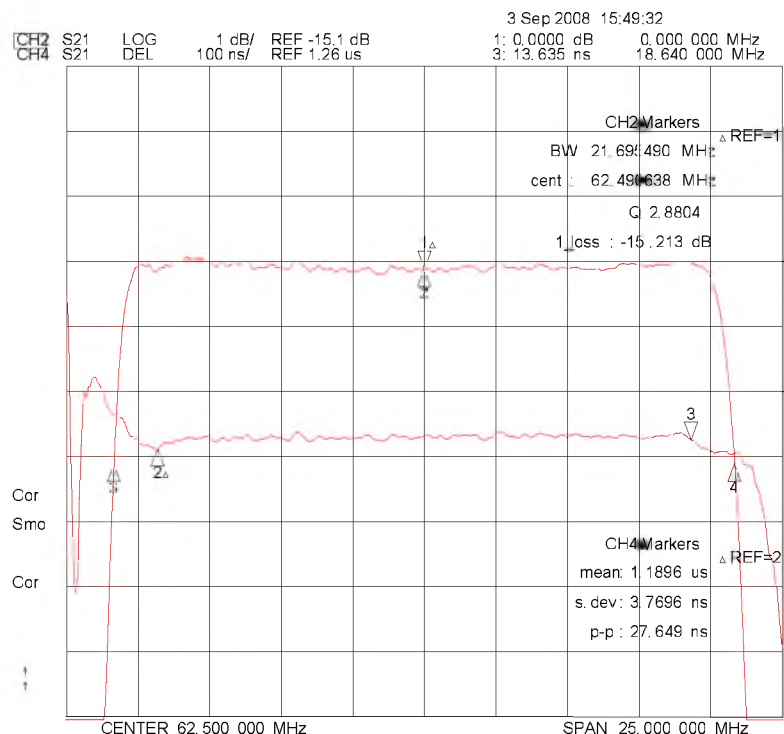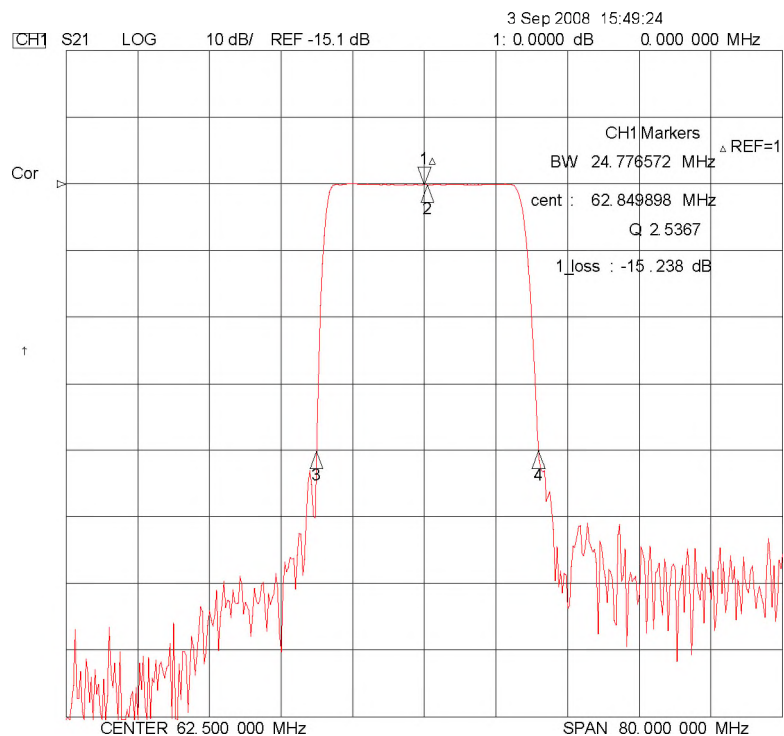

SAW
DEVICE

