


SAW Bandpass Filter 220405B



1. Features

- IF Bandpass Filter
- High Attenuation
- Single-Ended Operation
- DIP Package
- Maximum Storage Temperature Range : -40 °C ~ 85 °C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

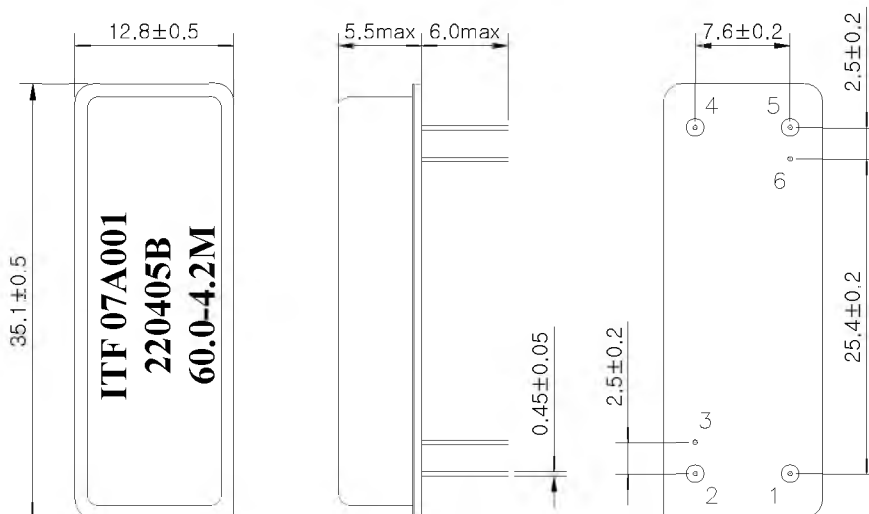

Package : D3512

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

SAW Bandpass Filter 220405B



3. Specifications

Fo = 60.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	60.0	-
Insertion Loss	dB	-	22.6	24.0
1dB Bandwidth	MHz	4.1	4.2	-
3dB Bandwidth	MHz	-	4.45	-
40dB Bandwidth	MHz	-	5.5	5.6
Amplitude Ripple (fo±1.92 MHz)	dB	-	0.4	1.0
Group Delay Variation (fo±1.92 MHz)	nsec	-	80	120
Absolute Delay	usec	-	3.69	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-18	-

Notes :


- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss

SAW Bandpass Filter 220405B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

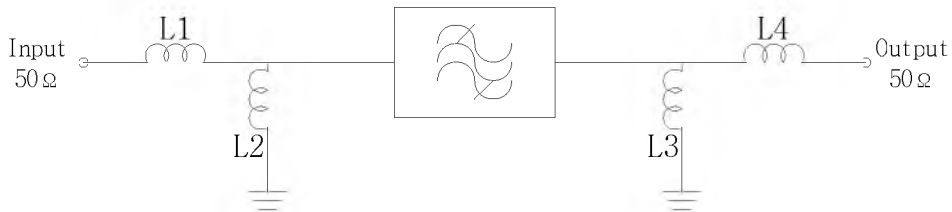

L1=180H, L2=220nH, L3=220nH,L4=150nH

5. Marking Configuration

ITF¹⁾ 07A001²⁾

220405B³⁾

60.0⁴⁾ -4.2M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Center Frequency

5) 1dB-Bandwidth

SAW Bandpass Filter 220405B



6. Typical Performance (at +25°C)

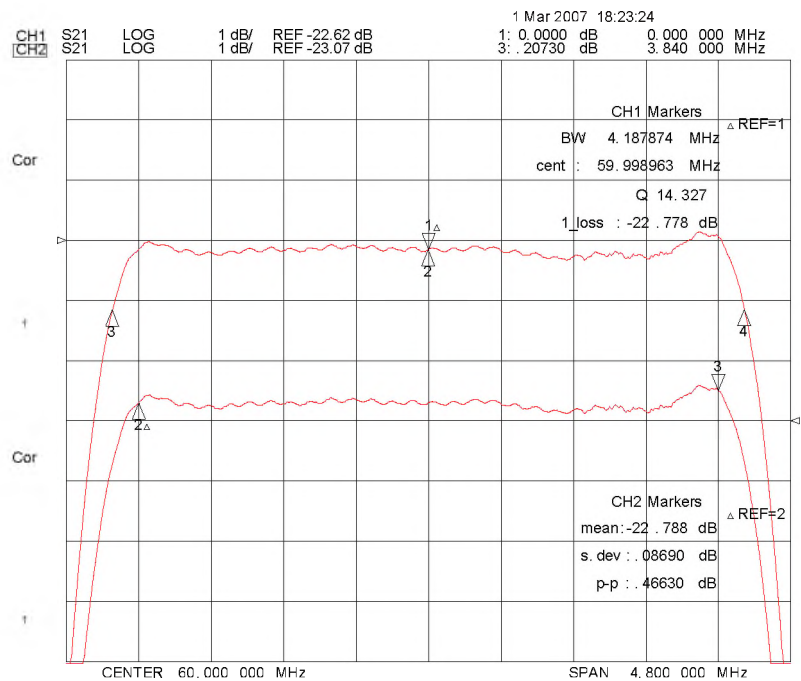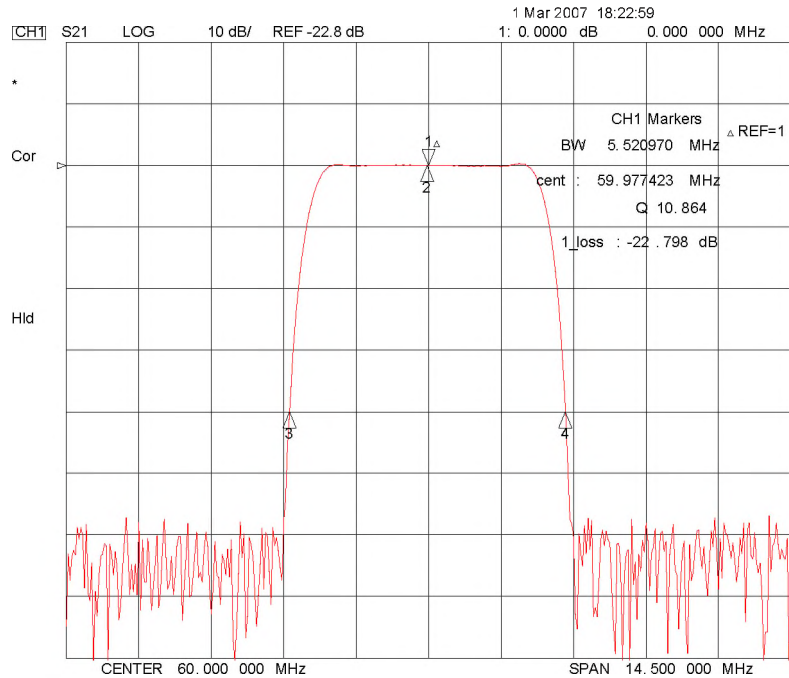

SAW Bandpass Filter 220405B

