


SAW Bandpass Filter F3702



Features

- RF bandpass filter
- Usable bandwidth 10.0 MHz
- No matching 50Ω single-ended operation
- Ceramic Surface Mounted Device (SMD) Package (3.8mm × 3.8mm)
- RoHS Compliant

Package Dimensions

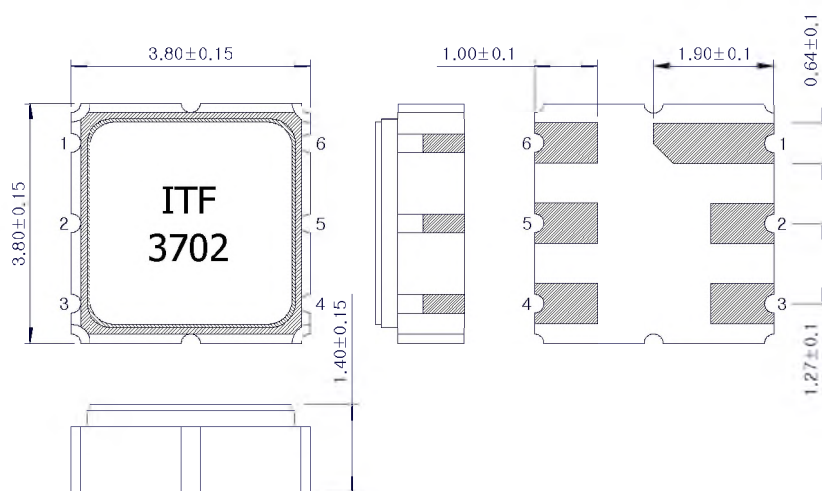

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	80
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm	-	-	15

Electrostatics Sensitive Device (ESD)

SAW Bandpass Filter F3702



Specifications

$F_c = 370.0 \text{ MHz}$

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	370	-
Insertion Loss ($F_c \pm 5.0 \text{ MHz}$)	dB	-	2.2	3.0
Amplitude Ripple ($F_c \pm 5.0 \text{ MHz}$)	dB	-	1.0	2.0
3dB Bandwidth	MHz	-	17	-
Absolute Group Delay (F_c)	nsec	-	80	-
Group Delay Variation ($F_c \pm 5.0 \text{ MHz}$)	nsec	-	40	-
VSWR ($F_c \pm 5.0 \text{ MHz}$)		-	1.8	2.5
Absolute Attenuation				
D.C. ~ 330.0 MHz		55	60	-
330.0 ~ 345.0 MHz		45	50	-
350.0 MHz		50	60	-
355.0 MHz		40	50	-
385.0 MHz		27	30	-
390.0 ~ 410.0 MHz		30	35	-
410.0 ~ 1000.0 MHz		52	55	-

Notes :


- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

SAW Bandpass Filter F3702



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



Marking Configuration

ITF¹⁾

3702²⁾

1) Manufacturer name



2) Marking Number

* Ink or Laser Marking available

SAW Bandpass Filter F3702





Typical Performance (at 25°C)

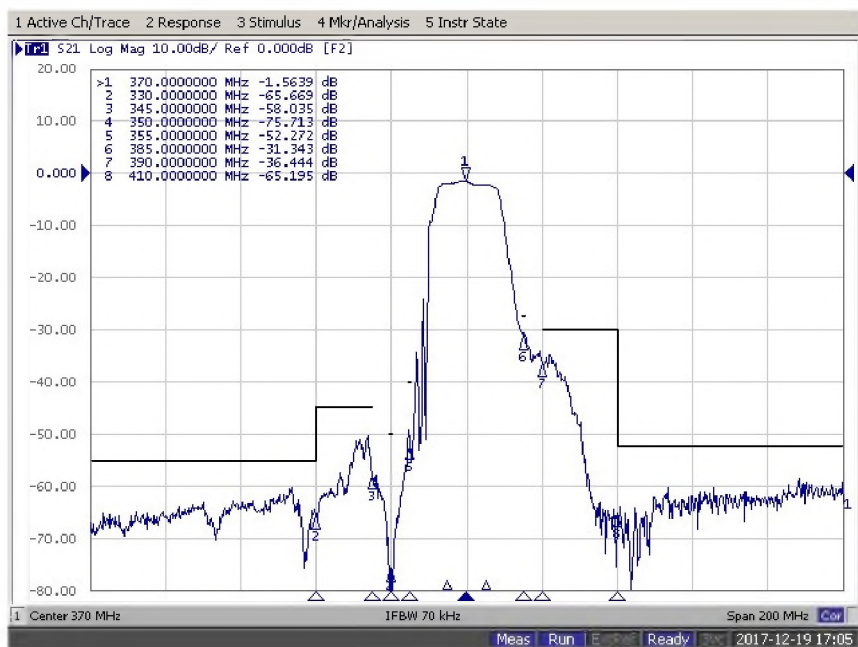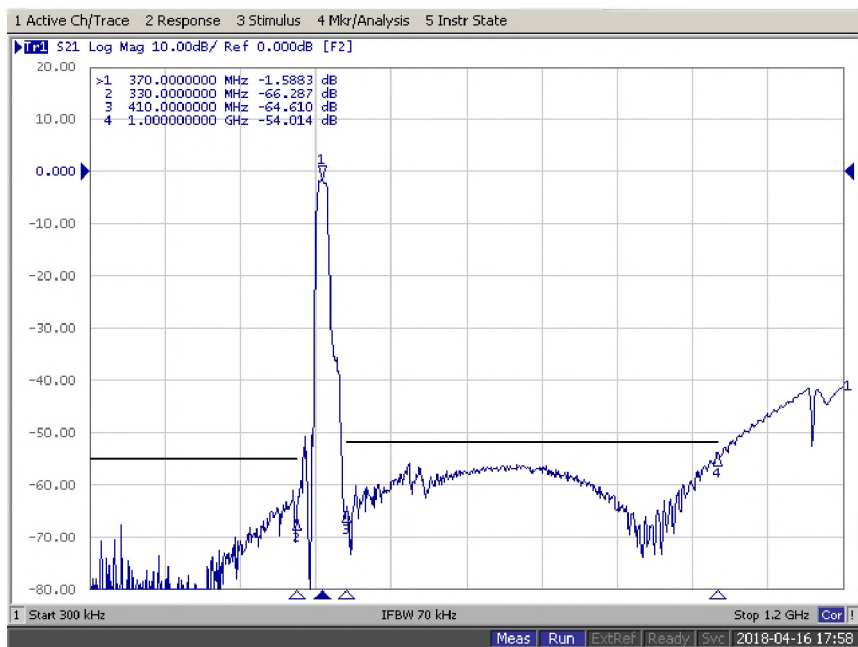



SAW Bandpass Filter F3702



Input / Output VSWR Charts

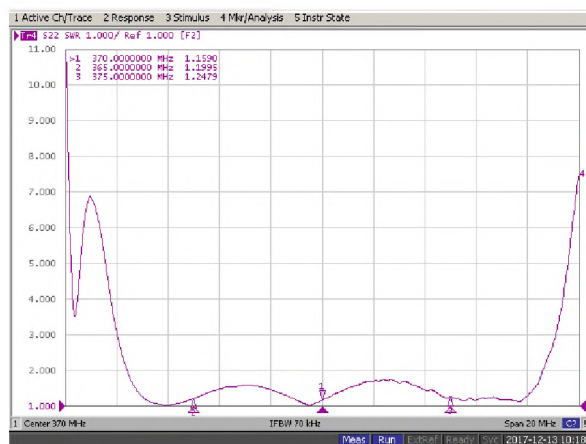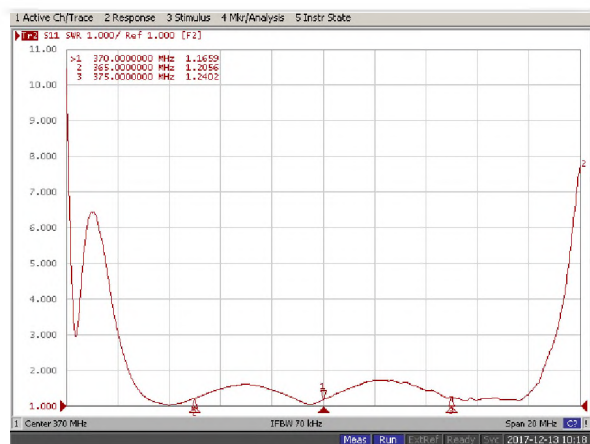

Input / Output Smith Charts

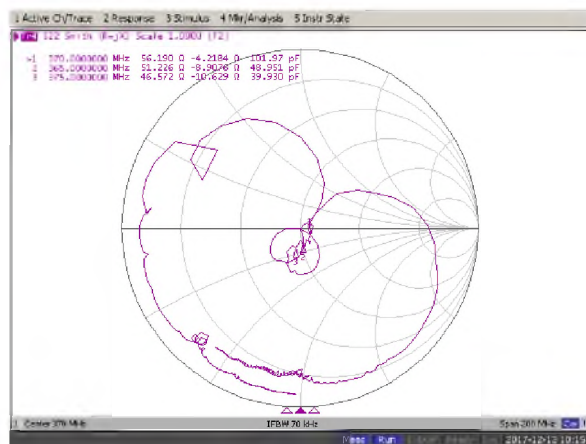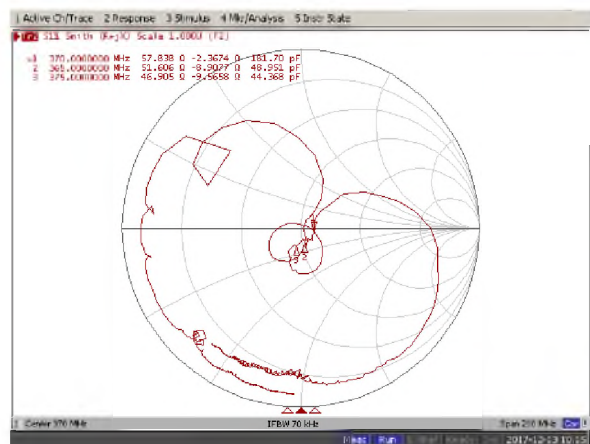


SAW Bandpass Filter F3702




Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

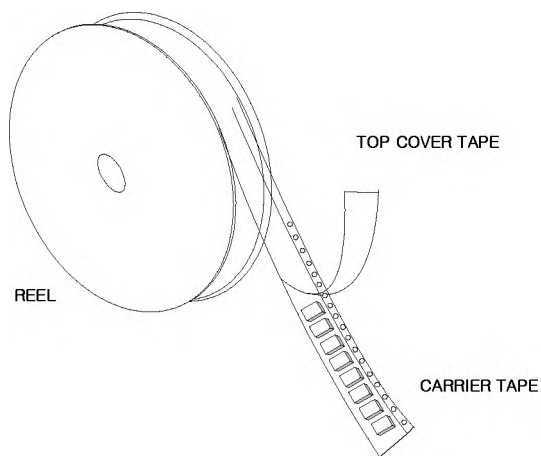

Tape Specification

1. Leader part and vacant position specification

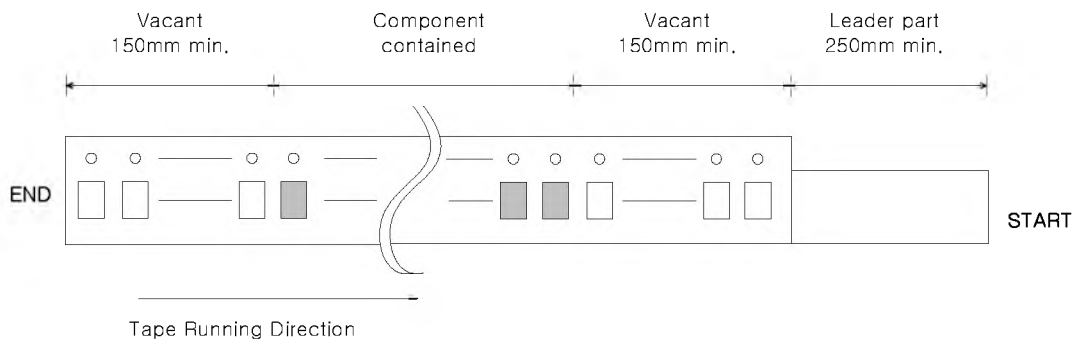

2. Tensile strength of carrier tape


4.4N/mm width

3. Top cover tape adhesion

1) pull off angle : 0~15°

2) speed : 300mm/min


3) force : 20~70g

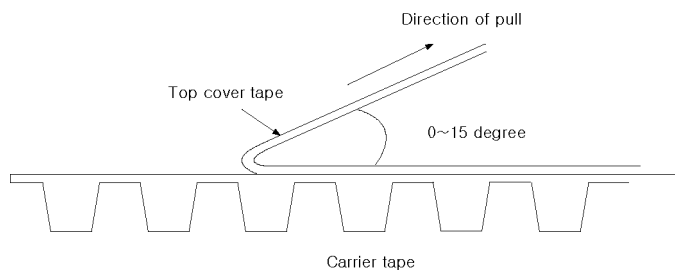

SAW Bandpass Filter F3702




Carrier Tape Dimensions [unit : mm]

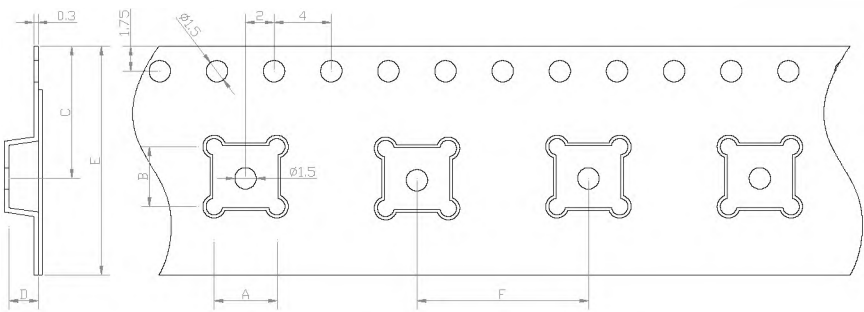

A	4.30 ± 0.1
B	4.30 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

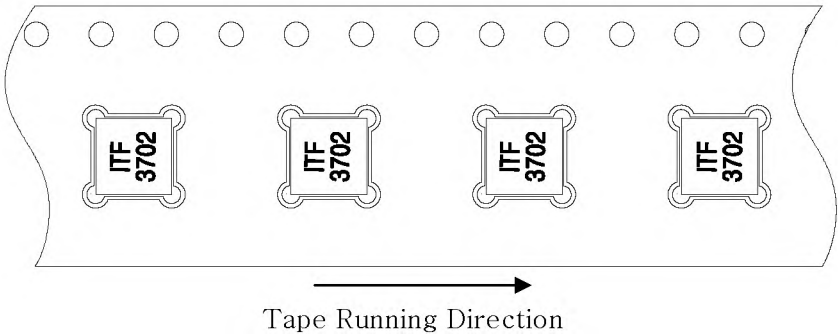

Reel Dimensions [unit : mm]

