

SAW Bandpass Filter F3156




Features

- RF SAW Band Pass filter
- Usable Passband **0.3 MHz**
- Ceramic Surface Mounted Device Package (3.0 mm × 3.0 mm)
- RoHS Compliant

RoHS Compliant

Tested by SGS Testing Korea

Package Dimensions

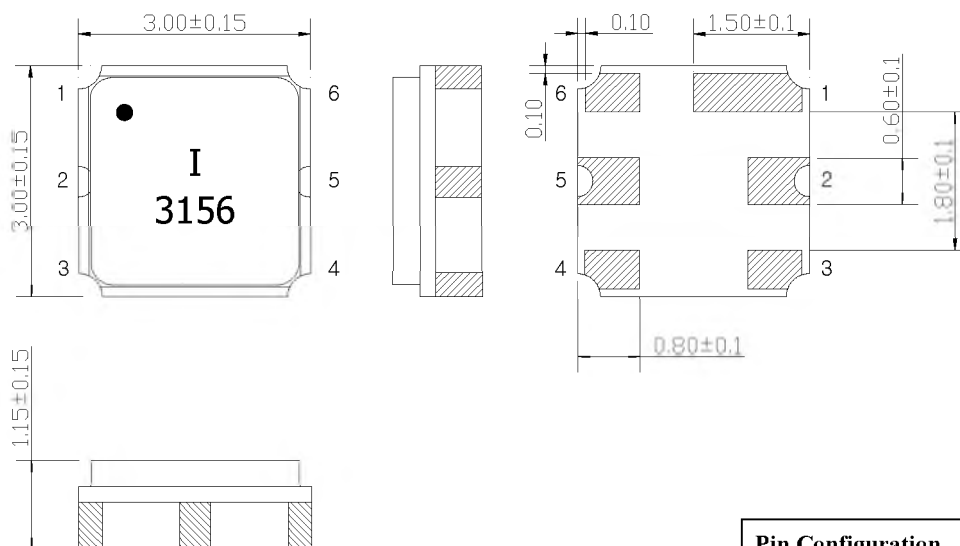

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration	
2	Input
5	Output
1, 3, 4, 6	ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-30	25	85
Storage Temperature Range	°C	-40	-	85
Power Handling Capability	dBm		11	

Electrostatics Sensitive Device (ESD)

SAW Bandpass Filter F3156



Specifications

$F_c = 315.0\text{MHz}$

Room Temperature : +25 °C		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	315.0	-
Insertion Loss (F_c)	dB	-	2.5	3.5
Amplitude Ripple (314.85 MHz ~ 315.15 MHz)	dB	-	0.5	2.0
Amplitude Ripple (314.82 MHz ~ 315.18 MHz)	dB	-	0.6	3.0
Amplitude Ripple (314.78 MHz ~ 315.22 MHz)	dB	-	1.5	6.0
Relative Attenuation				
10.00 ~ 295.00 MHz	dB	30	35	-
295.00 ~ 307.00 MHz	dB	30	35	-
307.00 ~ 313.20 MHz	dB	25	28	-
313.20 ~ 313.50 MHz	dB	25	28	-
316.50 ~ 320.00 MHz	dB	25	29	-
320.00 ~ 339.30 MHz	dB	18	22	-
339.30 ~ 370.00 MHz	dB	40	50	-
370.00 ~ 600.00 MHz	dB	52	57	-
600.00 ~ 1500.00 MHz	dB	60	65	-
1500.00 ~ 2500.00 MHz	dB	55	65	-
Input/Output Impedance	Ohm	-	50	-

Notes :


- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

SAW Bandpass Filter F3156



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)



$$L1 = L2 = 68\text{nH} , C1 = C2 = 5.6\text{pF}$$

Marking Configuration

● ¹⁾
I ²⁾
3156 ³⁾

1) Pad Number 1 Index

2) Manufacturer name



3) Marking Number

* Ink or Laser Marking available

SAW Bandpass Filter F3156




Typical Performance (at 25°C)

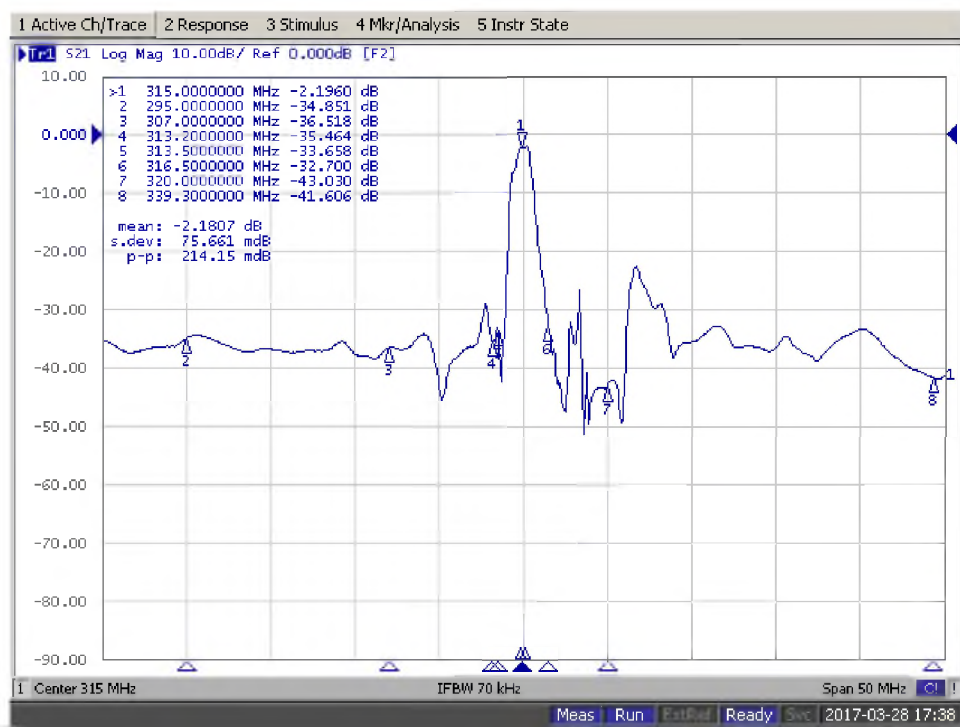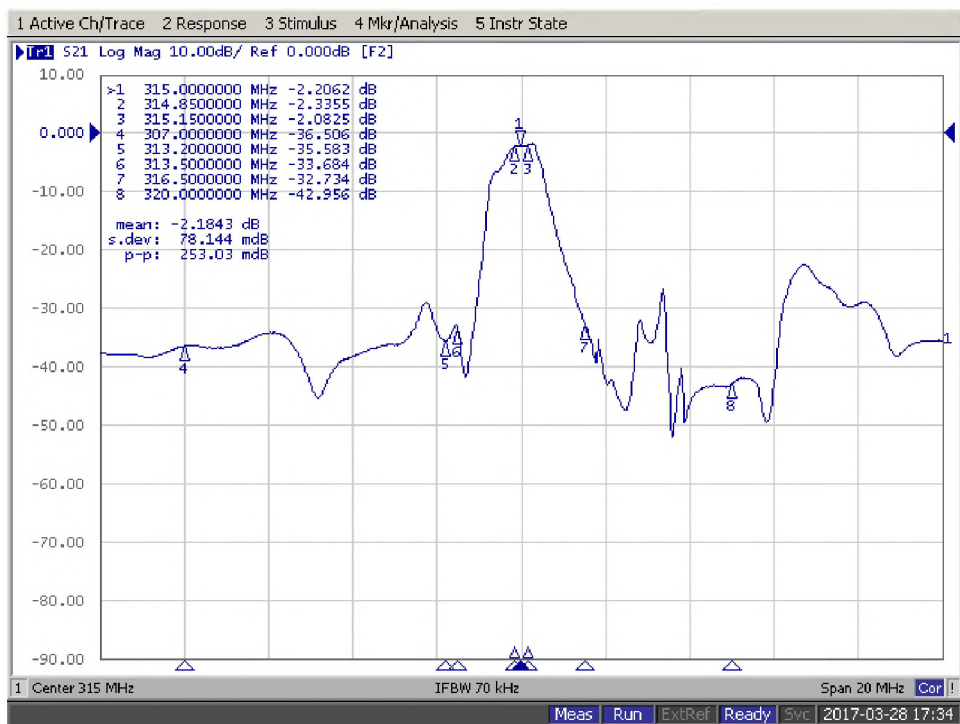



SAW Bandpass Filter F3156



Input / Output VSWR Charts

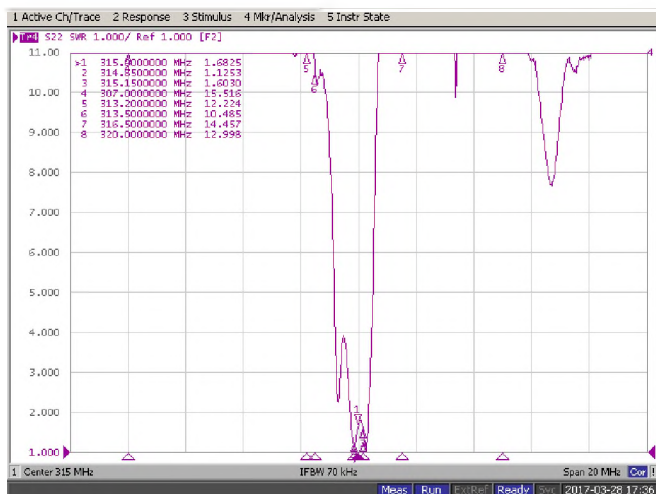

Input / Output Smith Charts

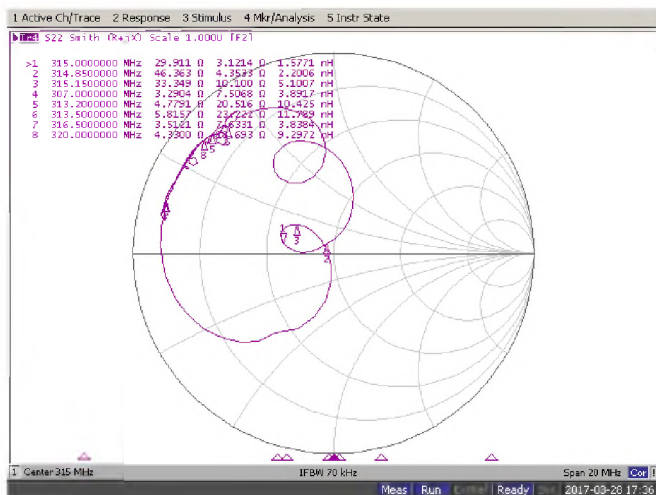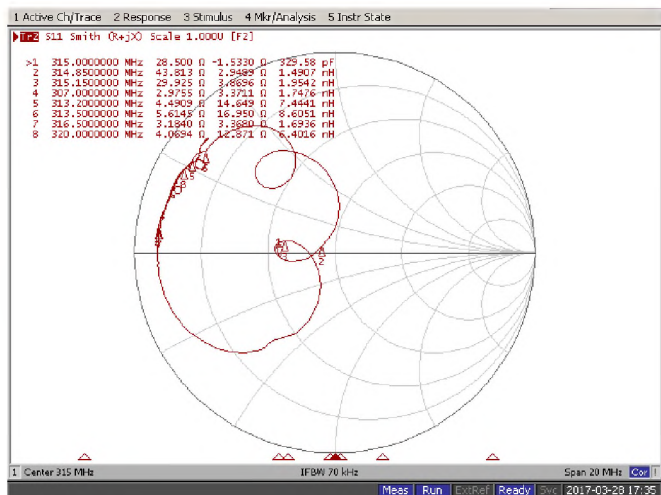


SAW Bandpass Filter F3156




Packing Specification

1. Reeling Quantity : 3000 pcs / 13" reel (or 1000 pcs / 7" reel)
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

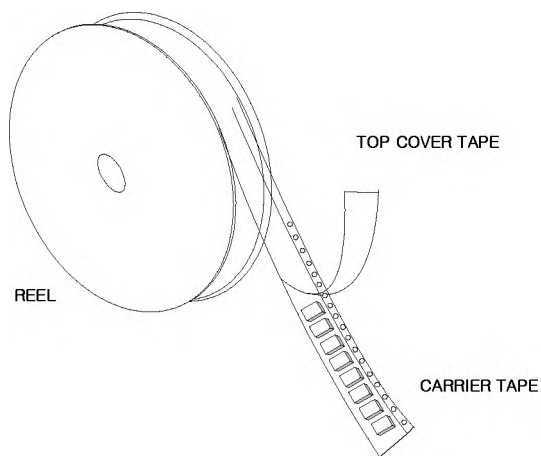

Tape Specification

1. Leader part and vacant position specification

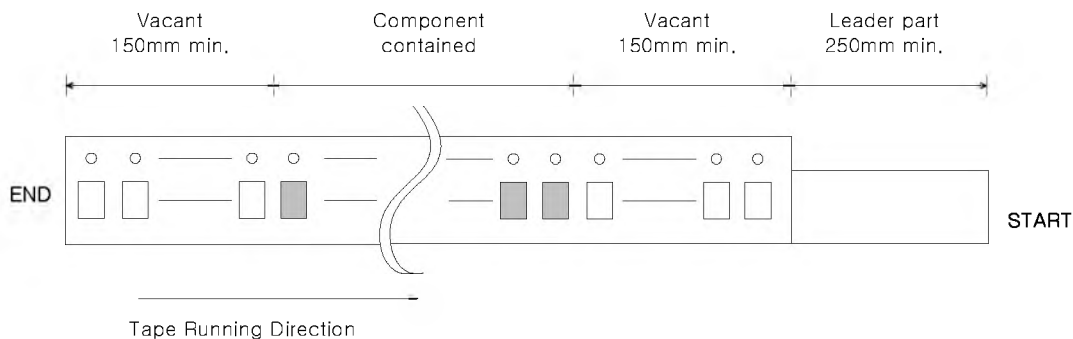

2. Tensile strength of carrier tape


4.4N/mm width

3. Top cover tape adhesion

1) pull off angle : 0~15°

2) speed : 300mm/min


3) force : 20~70g

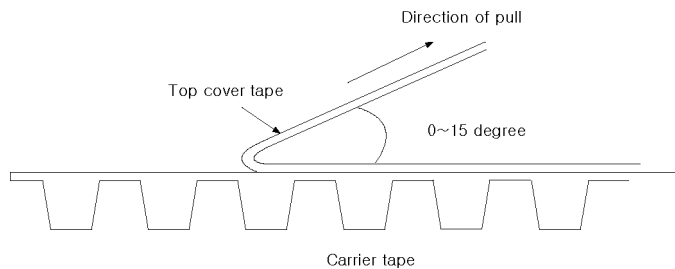

SAW Bandpass Filter F3156




Carrier Tape Dimensions [unit : mm]

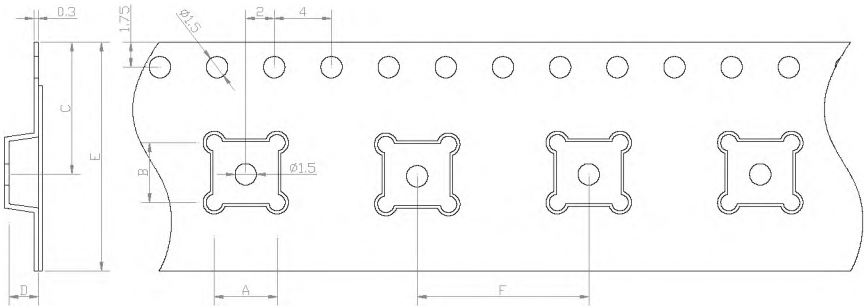

A	3.40 ± 0.1
B	3.40 ± 0.1
C	7.25 ± 0.1
D	1.70 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

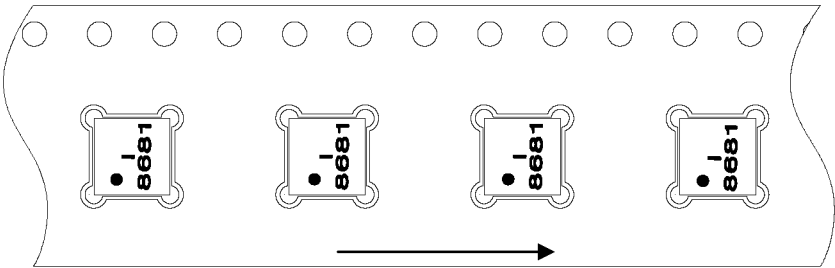

Tape Running Direction

Reel Dimensions [unit : mm]

