


SAW Bandpass Filter F1693



Features

- RF bandpass filter
- Usable bandwidth 0.2 MHz
- Ceramic Surface Mounted Device (SMD) Package (5.0mm * 5.0mm)
- RoHS Compliant

Package Dimensions

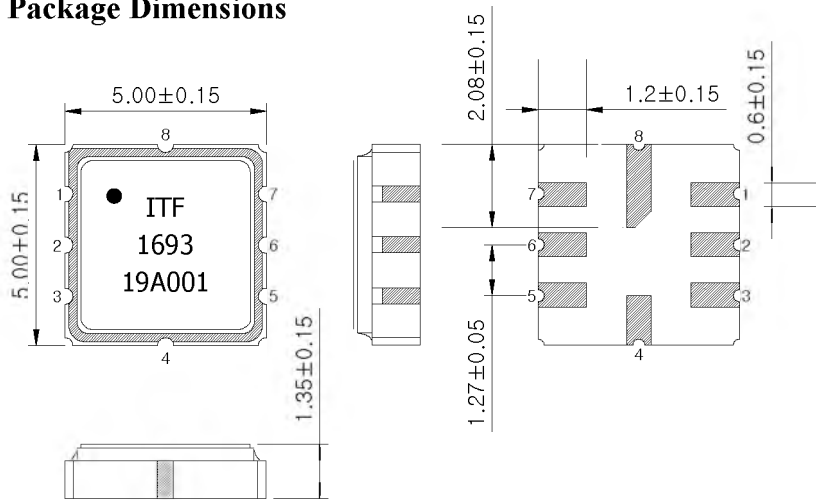

Dimensions shown are nominal in millimeters

Body : Al₂O₃ Ceramic

Lid : Kovar, Ni Plated

Terminations : Au plating 0.3 ~ 1.0 um, Over a 1.27 ~ 8.89 um
Ni Plating

Pin Configuration

Pin Configuration	
2	Input
6	Output
1, 3, 4, 5, 7, 8	Ground

Maximum Ratings

Parameter	Unit	Minimum	Typical	Maximum
Operating Temperature Range	°C	-40	25	85
Storage Temperature Range	°C	-45	-	125
Maximun DC Voltage	V	-	-	6
Power Handling Capability	dBm	-	-	10

Electrostatics Sensitive Device (ESD)

SAW Bandpass Filter F1693



Specifications

$F_c = 169.5 \text{ MHz}$

		Minimum	Typical	Maximum
Center Frequency (F_c)	MHz	-	169.5	-
Insertion Loss ($F_c \pm 0.1 \text{ MHz}$)	dB	-	2.3	3.0
Amplitude Ripple ($F_c \pm 0.1 \text{ MHz}$)	dB	-	0.7	1.5
Absolute Attenuation				
10.0 ~ 155.0 MHz	dB	40	42	-
155.0 ~ 168.5 MHz		15	16	-
171.4 ~ 171.8 MHz		16	22	-
171.8 ~ 172.8 MHz		7	10	-
172.8 ~ 185.0 MHz		16	22	-
185.0 ~ 300.0 MHz		40	42	-

Notes :


- 1) All specifications are based on the matching schematic shown below, measured by Agilent Network analyzer and full 2 port calibration.
- 2) Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances

SAW Bandpass Filter F1693



Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

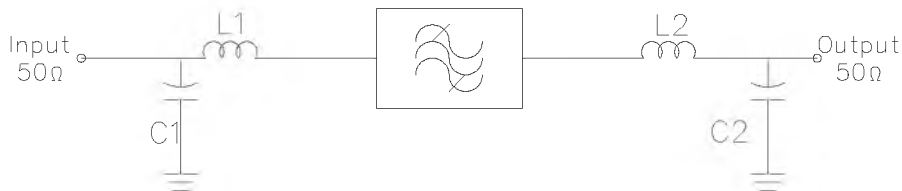

$$L1 = L2 = 180\text{nH}, \quad C1 = C2 = 15\text{pF}$$

Marking Configuration

1)
●
ITF²⁾
1693³⁾
19A001⁴⁾

1) Pad Number 1 Index

2) Manufacturer name

3) Part Number


4) Lot Number

* Ink or Laser Marking available


SAW Bandpass Filter F1693



Typical Performance (at 25°C)

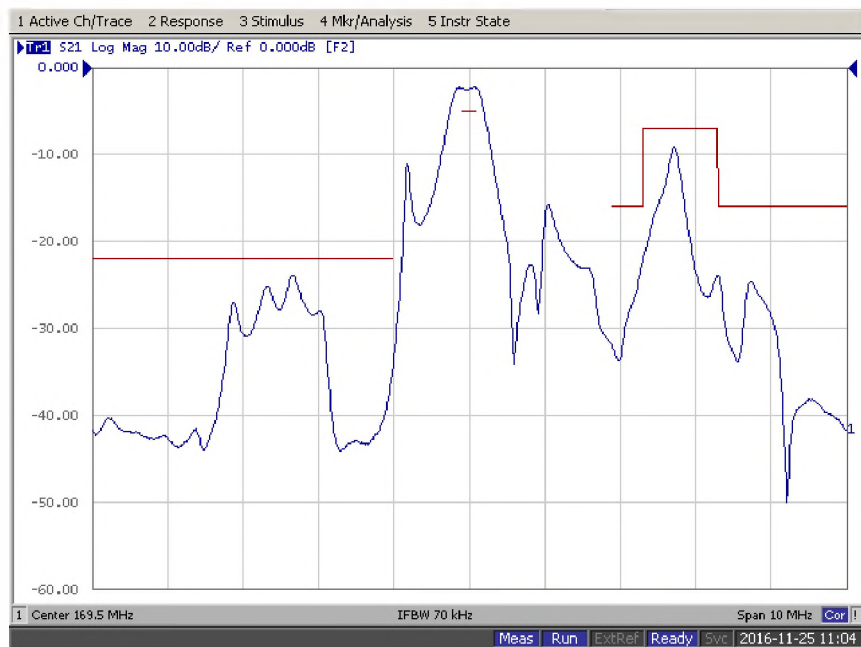

SAW Bandpass Filter F1693

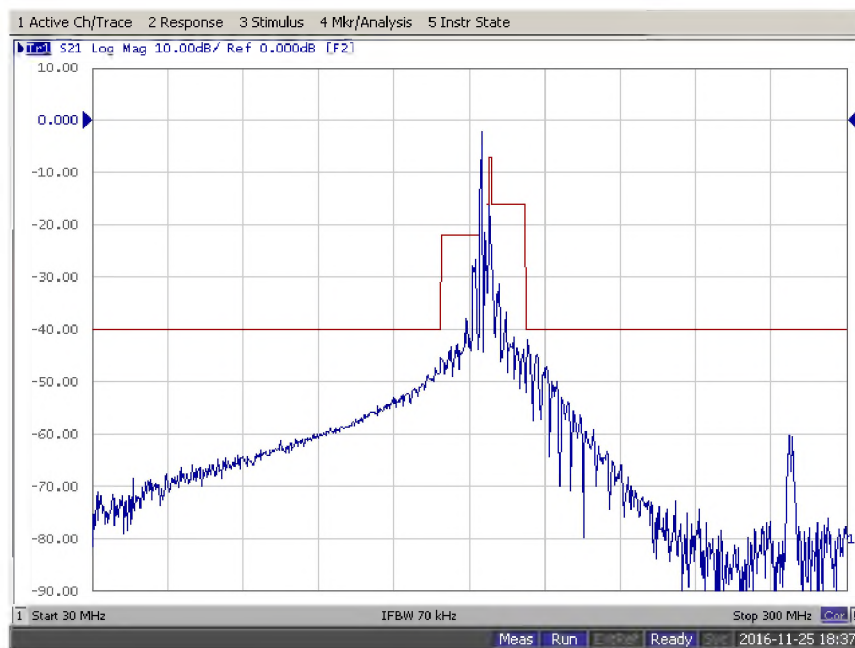


SAW Bandpass Filter F1693




Packing Specification

1. Reeling Quantity : 1000 pcs / reel
2. Taping Structure : The tape shall be wound around the reel in the direction shown below.

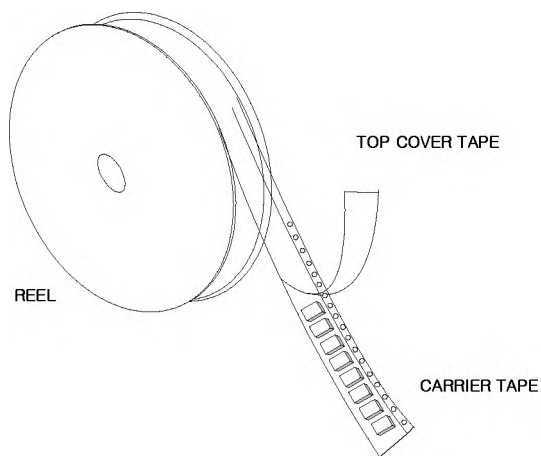

Tape Specification

1. Leader part and vacant position specification

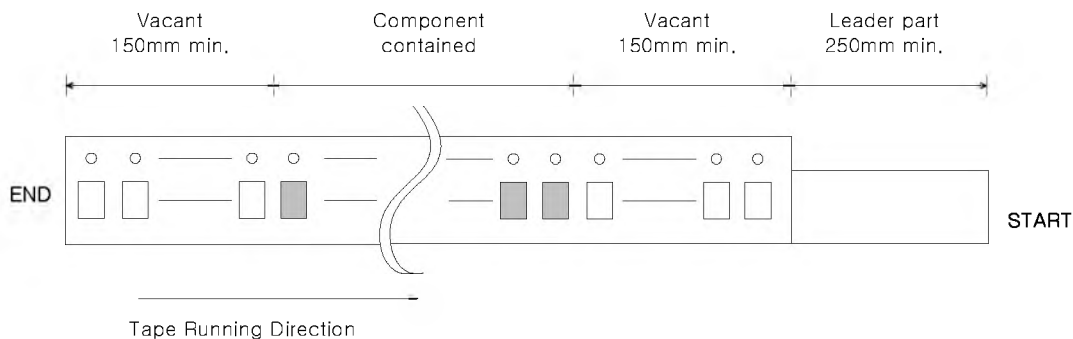

2. Tensile strength of carrier tape


4.4N/mm width

3. Top cover tape adhesion

1) pull off angle : 0~15°

2) speed : 300mm/min


3) force : 20~70g

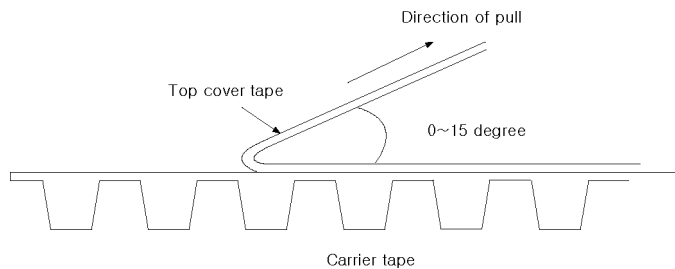

SAW Bandpass Filter F1693




Carrier Tape Dimensions [unit : mm]

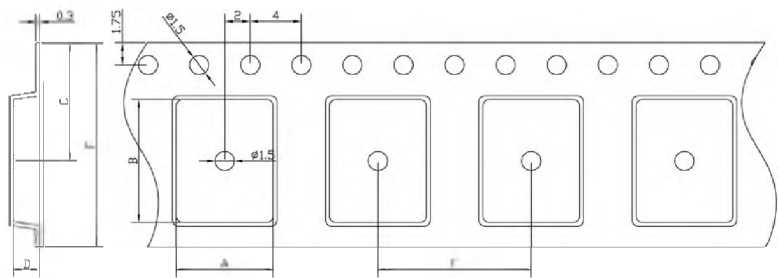

A	5.50 ± 0.1
B	5.50 ± 0.1
C	7.25 ± 0.1
D	1.95 ± 0.1
E	12.00 ± 0.1
F	8.00 ± 0.1

Part Direction

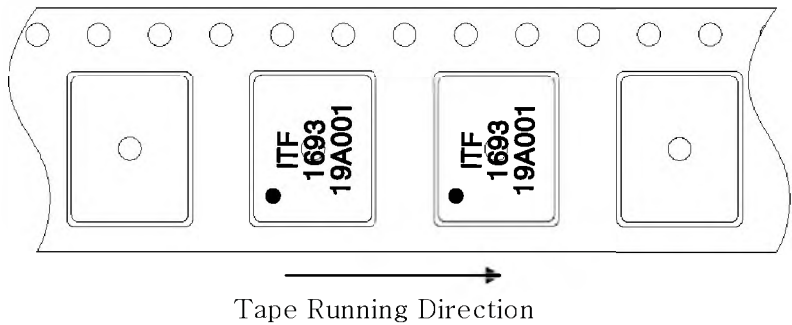

Reel Dimensions [unit : mm]

