

1. Features

- Typical 1dB bandwidth of 9.8 MHz
- High attenuation
- Single Ended Operation
- Dual In-line Package (DIP)

RoHS Compliant


Tested by SGS Testing Korea

2. Electrical Specifications


Source and Load Impedance = 50Ω

Operating Temperature : +25°C		Minimum	Typical	Maximum
Center Frequency (fo)	MHz	-	57.6	-
Insertion Loss	dB	-	25.0	26.5
1dB Bandwidth	MHz	9.7	9.8	-
3dB Bandwidth	MHz	-	10.5	-
40dB Bandwidth	MHz	-	13.31	13.4
Amplitude Ripple (fo ± 4.6 MHz)	dB	-	0.5	1.0
Group Delay Variation (fo ± 4.6 MHz)	nsec	-	25	60
Absolute Delay	usec	-	1.36	1.4
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-72		

D2012 Package Dimension

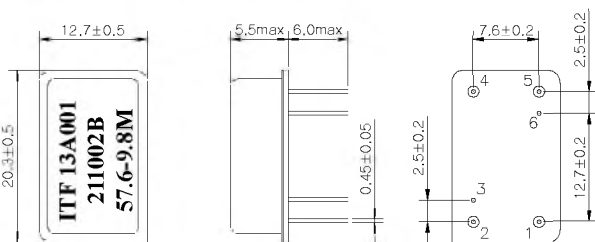

Matching Schematic

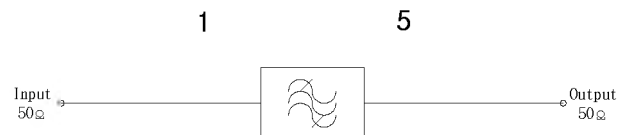

Unmatching required

Pin Configuration

	1	Ground	2,4
Input	1	Ground	2,4
Output	5	Others	Ground

Dimensions shown are nominal in millimeters


Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated


Termination : Kovar, Au Plated

3. Typical Performance (at +25°C)


1dB Bandwidth & Ripple

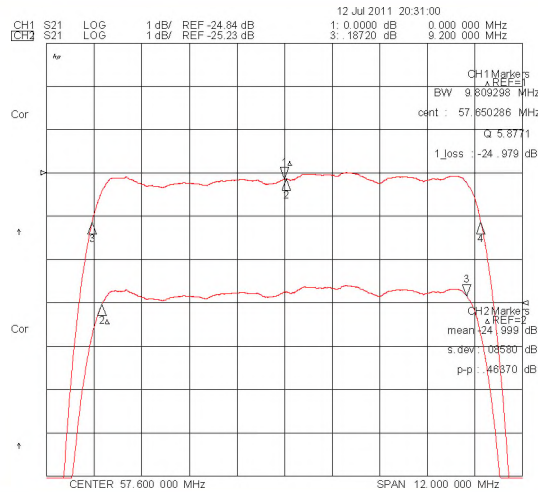


40dB Bandwidth

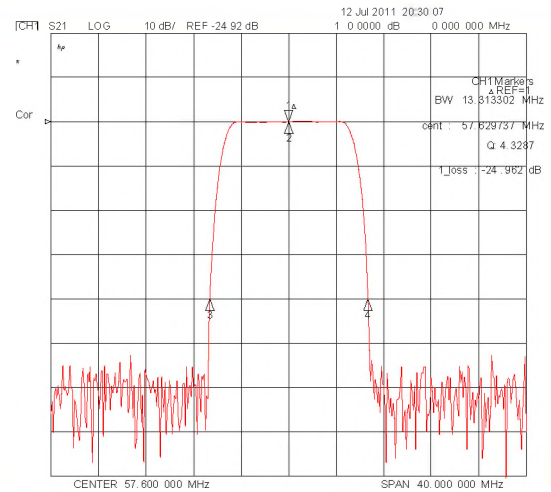


3dB Bandwidth & Group Delay

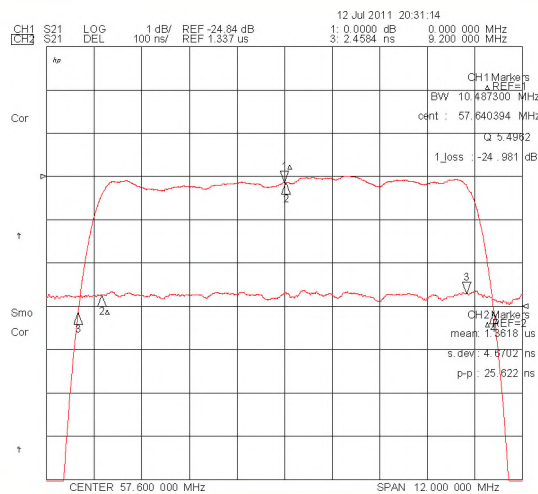

50dB Bandwidth

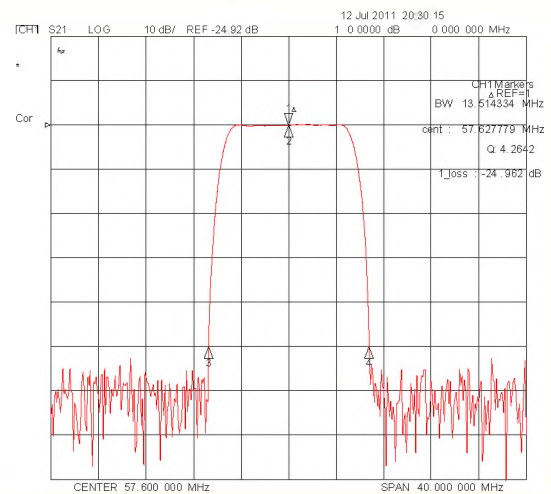

Smith Chart (S11 & S22)

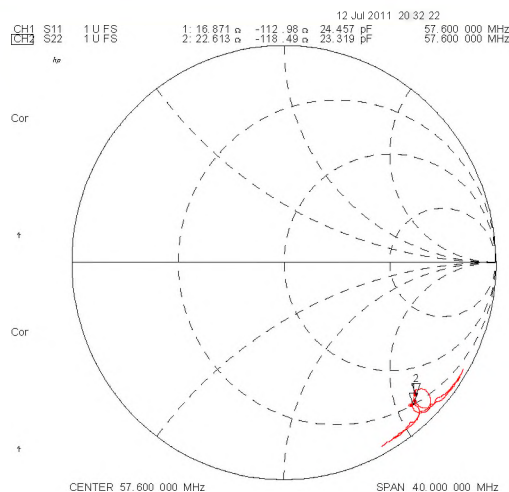

SWR(S11 & S22)

