


SAW Bandpass Filter 221902B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- Dip Package
- Maximum Storage Temperature Range : -40 °C ~ 85 °C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

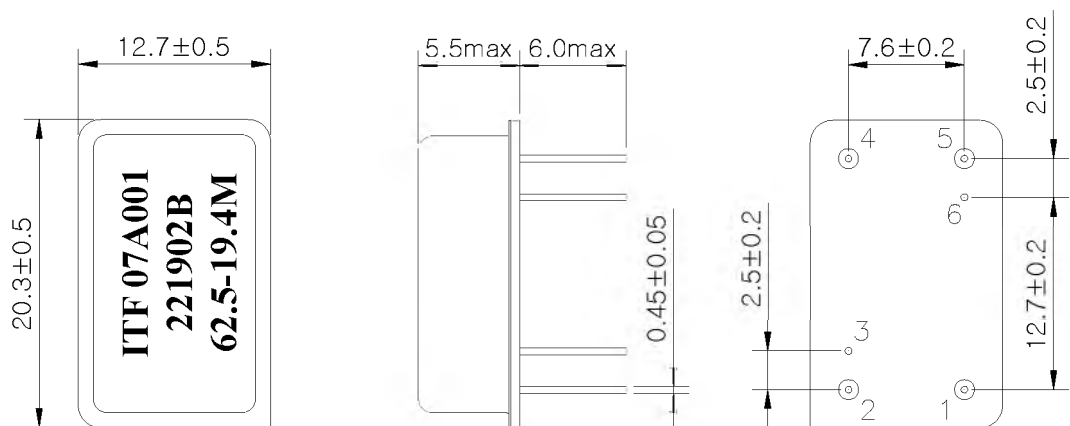

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

SAW Bandpass Filter 221902B



3. Specifications

Fo = 62.5 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	62.5	-
Insertion Loss	dB	-	24.0	25.5
1dB Bandwidth	MHz	-	19.4	-
3dB Bandwidth	MHz	19.8	19.92	-
40dB Bandwidth	MHz	-	22.06	22.15
Amplitude Ripple (Fo +/- 9.22 MHz)	dB	-	0.45	1.0
Group Delay Variation (Fo +/- 9.22 MHz)	nsec	-	50	100
Absolute Delay	usec	-	1.84	-
Ultimate Rejection	dB	50	55	-
Relative Attenuation				
Fo +/- 10MHz	dB	25	37	
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :


- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss

SAW Bandpass Filter 221902B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

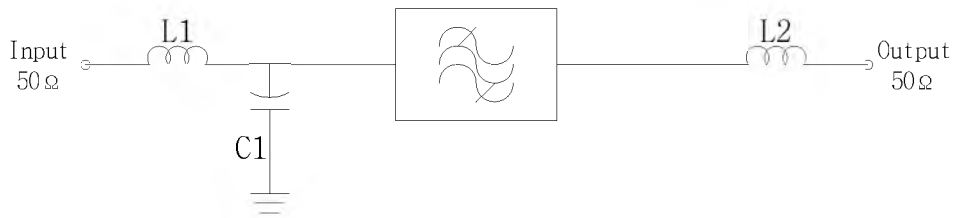

$L1 = 150\text{nH}$, $L2 = 180\text{nH}$, $C1 = 12\text{pF}$

5. Marking Configuration

ITF¹⁾ 07A001²⁾

221902B³⁾

62.5⁴⁾ -19.4M⁵⁾

1) Manufacturer name

2) Lot Number

3) Part Number



4) Center Frequency

5) 1dB-Bandwidth

SAW Bandpass Filter 221902B



6. Typical Performance (at +25℃)

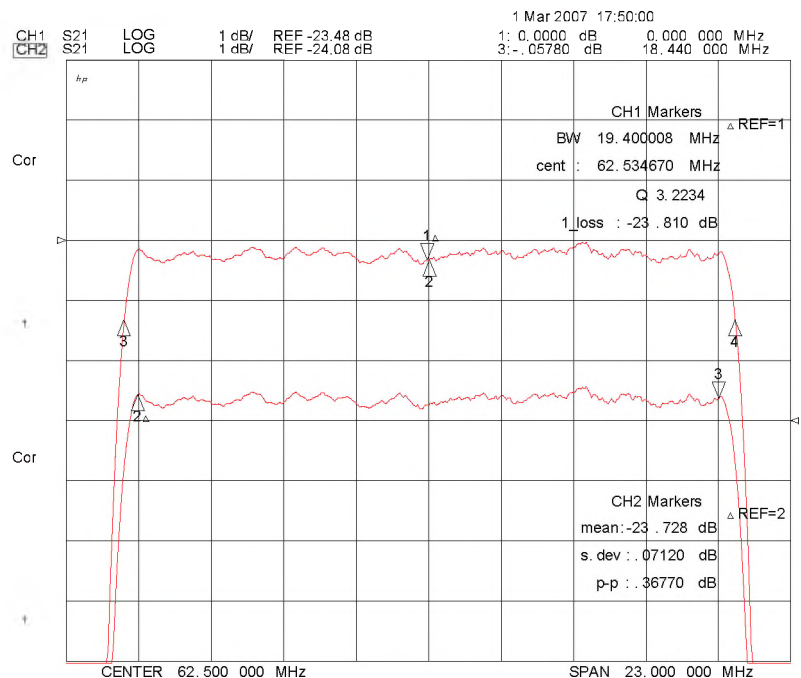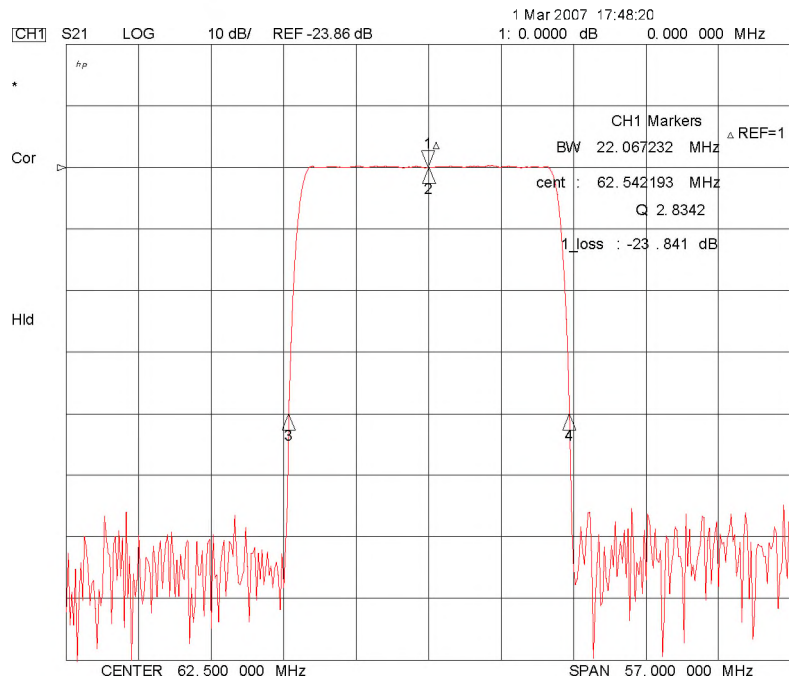

SAW Bandpass Filter 221902B

